


Safety must be removed to install stock onto gun.

Safety has already been removed.

After trigger and stock are installed on gun, install safety.

Take a SMALL flat-blade screwdriver and find the spring inside the trigger hole. Push it forward.

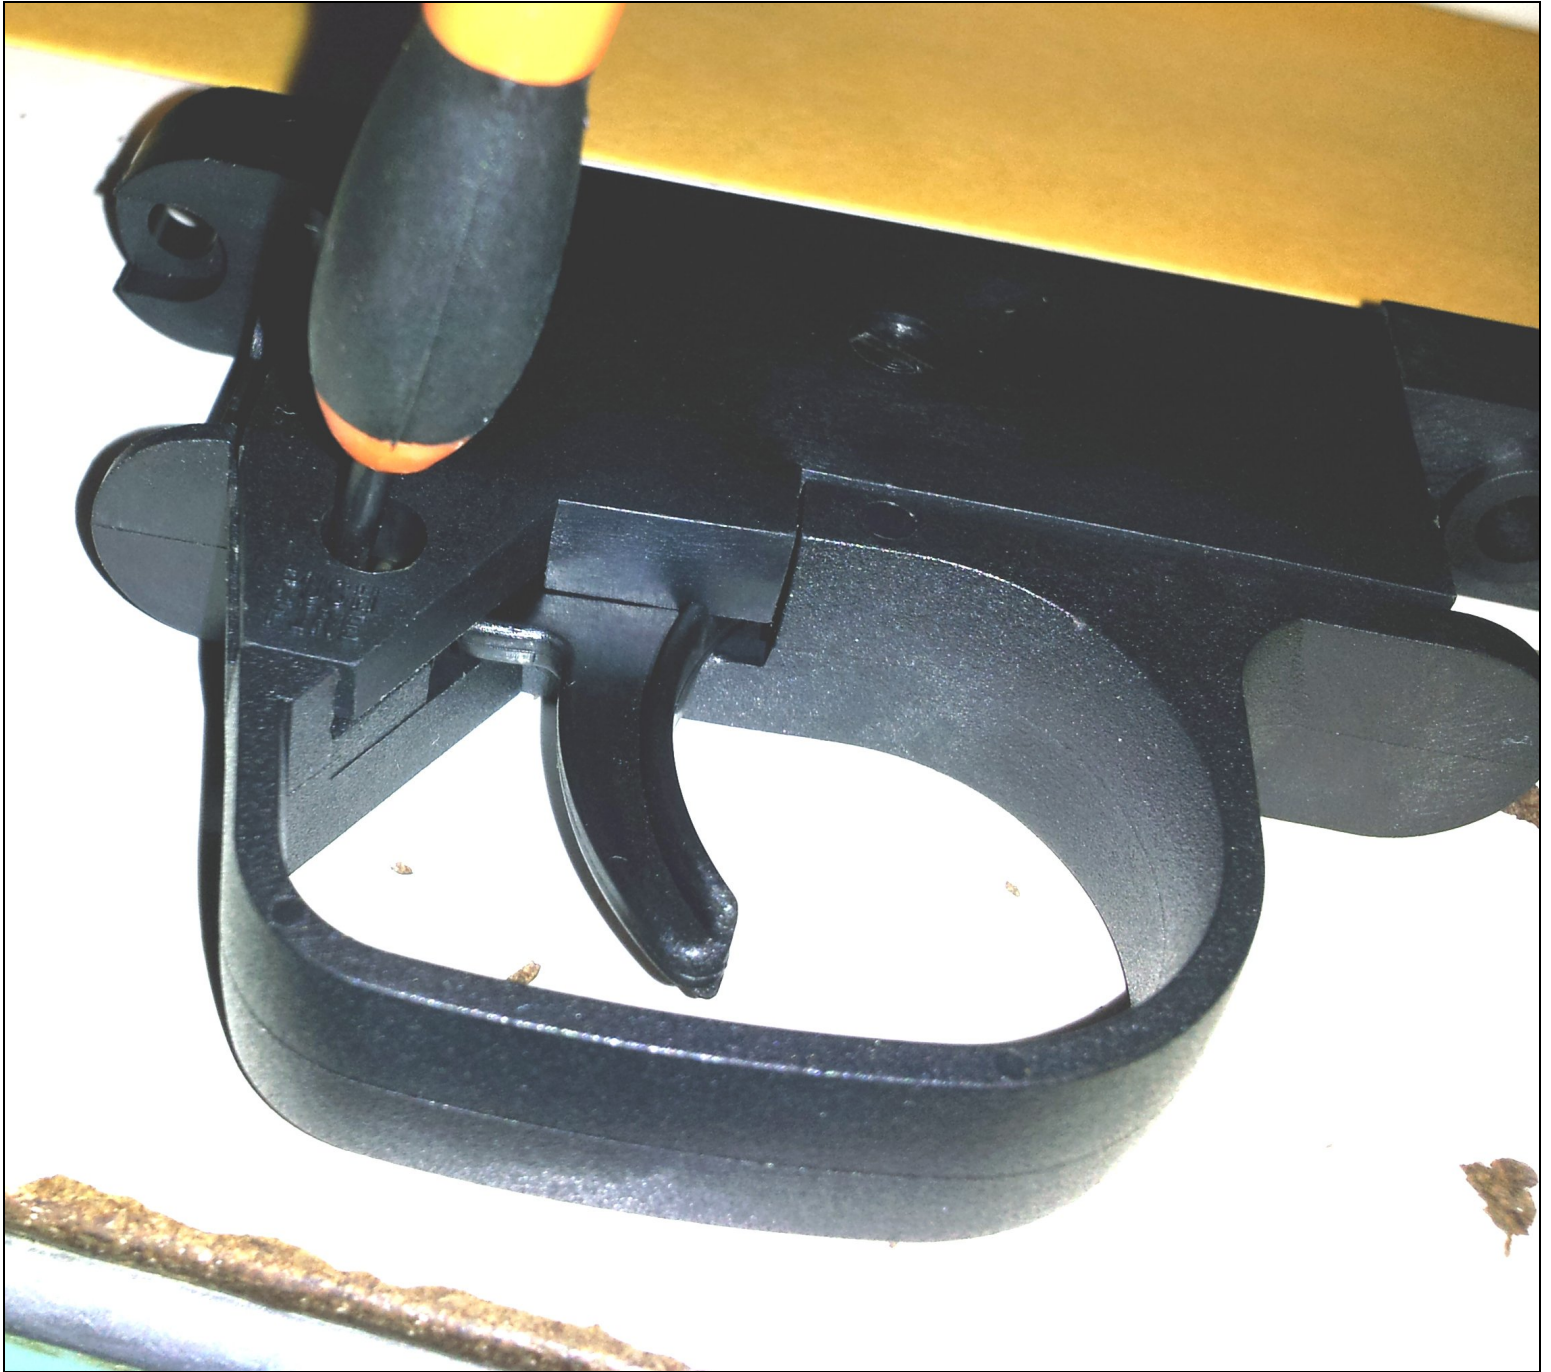

Push spring forward until the tip is exposed directly behind the trigger.





Take a razor or similar thin object and hold the spring forward.

With spring held forward, the safety will easily insert into the hole.

After safety is inserted, remove razor.

